


MONUMENT RECORD

Corner ID: **Rich_M05**

Section Corner



Sections 3, 4, 9, & 10- T09N-R02W, 2nd P.M.

Richland Township, Monroe County, Indiana



MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)
0.35' x 0.33' limestone monument with cut 'X' found flush

MONUMENT LOCATION SKETCH:

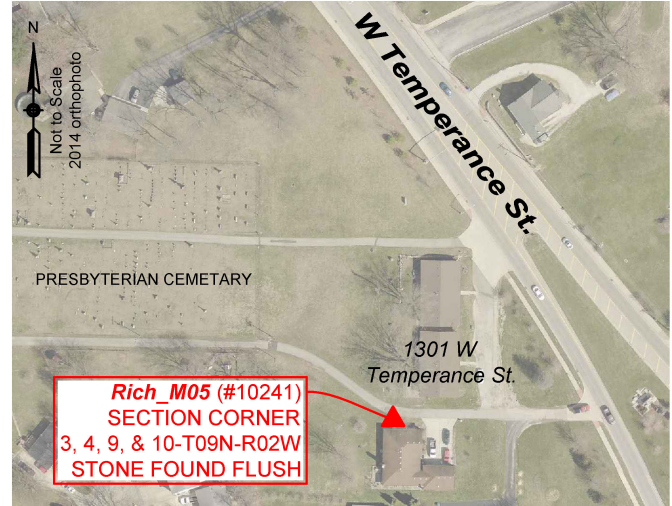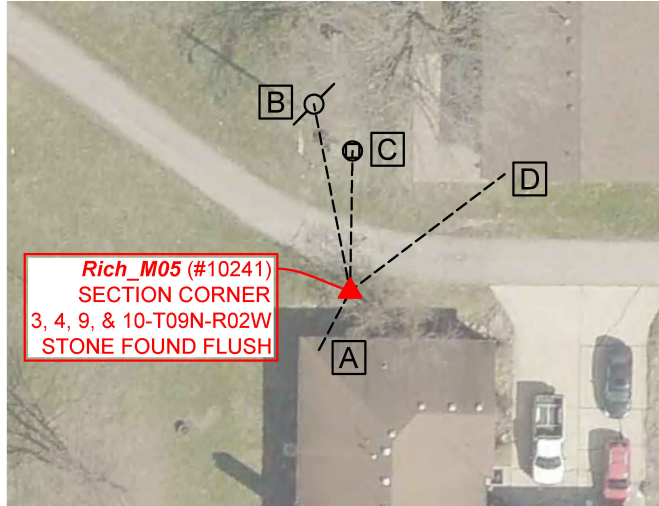

WITNESS MONUMENT TIES			
ID	BEARING	DISTANCE	DESCRIPTION
Witness A	S 28d W	13.9'	The northwest corner of brick home at 1255 W Temperance Street
Witness B	N 11d W	39.8'	Mag nail found 4.5' above grade in "Protect Nearby Survey Marker" sign on the east side of an 8" power pole
Witness C	N 1d E	29.3'	The top southeast corner of a 30" x 30" x 48" stone pillar
Witness D	N 53d E	40.6'	The southwest corner of foundation at 1301 W Temperance Street

PHOTO IDENTIFIED: Photo Date: 10/09/2019



Photo Orientation & Description: Rich_M05 from above



Photo Orientation & Description: Looking south at Rich_M05



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3

MONUMENT RECORD

Corner ID: **Rich_M05**

Section Corner

Sections 3, 4, 9, & 10- T09N-R02W, 2nd P.M.
Richland Township, Monroe County, Indiana




Photo Orientation & Description: Looking west at Rich_M05



Photo Orientation & Description: Looking north at Rich_M05

EXISTING SURVEY HISTORY *Include as much detail and history of the corner as known at the time of perpetuation*

ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: 9/18/1815 By: Arthur Henrie

Where filed or recorded: F_EV02P337

Original monument: Set a post for the corner from which a sugar 20" diameter stands for the corner

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 5/5/1888 By: Andrew Dillman, MCS

Where filed or recorded: MCSO LSB2, pg 464 (RSID003255)

Original monument: Planted sawed stone in stump remnant of government corner which had been perpetuated by stones in the survey of town of Ellettsville and testified to by several old reliable citizens.

Bearing Trees or Reference Monuments:

Species	Bearing	Distance
Planted sawed stone	South	16.5'
Used sawed stone from town of Ellettsville survey	S 86.5° E	33'

Notes: Located by remnant of government corner

OTHER SURVEY HISTORY: *Include details such as surveyor name, date, recording info, monument description, etc.*

Date	RSID	Surveyor	Description	Source	Cabinet/Book	Pg	InstNo
4/18/2003	003283	Sheppard, Michael	Survey in Sections 9 & 16-T9N-R2W	Recorder's Office	Filed digitally in the Recorder's Office		2003014612.IN
11/9/2011	000333	Curry, Douglas R.	Constable Add. To Ellettsville Owner: Brinkman, Shunn, Blackwell, Bingham, Sheppard, & Taylor	Recorder's Office	Filed digitally in the Recorder's Office		2011015343.IN
3/12/2018	000217	Page, Jason M.	A part of the Harris Addition Ronald & Deloris Brinegar	Recorder's Office	Survey Cabinet S2	105	2018002952.IN
9/25/2018	001883	Curry, Douglas R.	The Presbyterian Cemetery. Giback Properties LLC	Recorder's Office	Filed digitally in the Recorder's Office		2018014644.IN
5/16/2019	003099	Deckard, Eric Lee	Daniel Fishel Minor Subd.	Recorder's Office	Filed digitally in the Recorder's Office		2019010585.IN

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 10/09/2019 By: RSO & CAR Monument Found: Stone BTs or Reference Objects Found: Found all witnesses from 2006 monument record Project #: INDOTNetwork2019 Field Book: 53/71

OTHER EVIDENCE: Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.

Stone is in the side yard of 1255 W. Temperance Street, 4.5' south of the edge of asphalt

MONUMENT PRESERVATION: Describe work done to preserve existing monument.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 2 of 3


MONUMENT RECORD

Corner ID: **Rich_M05**

Section Corner

Sections 3, 4, 9, & 10- T09N-R02W, 2nd P.M.

Richland Township, Monroe County, Indiana



Updated distances to all ties and measured distance from edge of asphalt to monument. Painted stone orange and collected coordinates.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*
The stone was set by Monroe County Surveyor Andrew Dillman in 1888 per Reference Survey ID003255. It was witnessed by Monroe County Surveyors Edmund Farkas in 1982 and Kevin Enright in 2006. It was accepted as the best evidence of the corner with no associated uncertainty.

GEODETIC COORDINATES: *Northing:* 1453610.9', *Easting:* 3080981.1'

BASIS OF GEODETIC COORDINATES: The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Distances obtained with GPS have not been adjusted to ground. Coordinate data was collected with a Javad Triumph LS Network Rover.

CERTIFICATIONS:



Rachel Oser 9/29/2020
Rachel Oser, Indiana PS 21100022



Trohn Enright-Randolph 9/24/2020
Trohn Enright-Randolph, Monroe County Surveyor



Accepted by the Monroe County
Surveyor Review Board on
9/24/2020



MONUMENT RECORD
State of Indiana - County of Monroe

Section: 9

Township: 9 North


Range: 2 West

Corner ID: Rich M-05

Monument Description & Remarks: Limestone monument, height; flush, length; 0.35ft, width; 0.33ft, found 4ft south of road. Survey Sign 5ft above ground at pt. (C).

References On File: Michael E. Sheppard survey, Instrument #2003004433 (2003), on file in Surveyor Office.

RECOVERY TIE DRAWING
Field Book 38 Page No. 37

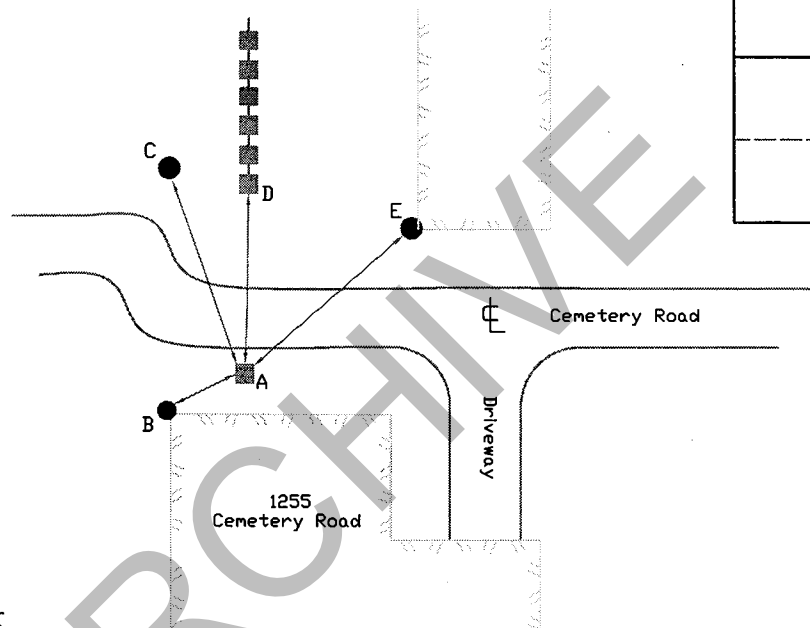

A - Limestone Monument.

B - S 48° W 13.50' to NE corner of Brick Home.

C - N 11° W 39.33' to MAG nail in Survey Sign on 8" PWP.

D - N 01° E 28.93' to Top Of 30"x30"x48" Pillar. *SE corner*

E - N 53° E 40.54' to SW corner of Foundation.

Not To Scale
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 36-1-11 of the Indiana Code; and the above data is given under my hand and seal this 19th day of September, 2006.

Kevin P. Enright



Administered by the Monroe County Surveyor Review Board

Date: 9-19-06

MONUMENT RECORD

CORNER I.D.
M - 5

STATE OF INDIANA - COUNTY OF MONROE

SECTION 9, TOWNSHIP 9 North, RANGE 2 West

MONUMENT DESCRIPTION & REMARKS

4" x 4" cut limestone. 3" out of ground.

RECOVERY TIE DRAWING

TELEPHONE POLE

N 30° W
25.6'

HOUSE

36.8'
N 45° E

SE CORNER OF
CONCRETE POOL

SOUTH
84.2'

ELECTRICITY POLE

(●) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF Monroe

I, Edmund O. Farkas HEREBY CERTIFY THAT THIS DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL THIS 16 DAY OF April, 19 82 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. S0114

OR

UNITED STATES GOVERNMENT AGENCY

TOWNSHIP:
Richland

CORNER I.D.

M - 5

TITLE